


## Accelerometer AT112-HF-IS

Temperature Range - 50 to 121 °C

Sensitivity 100 mV/g

### Technical Specification

Frequency Response	0.6-15 000 Hz $\pm$ 3dB
Dynamic Range	$\pm$ 50 g, peak
Current Excitation	2-10 mA
Bias Voltage	7-14 VDC
Sealing	Welded, Hermetic
Weight	60 g
Material	316L Stainless Steel
Mounting	M6
Connector	2 Pin Mini-MIL
Mounted Resonance	35 000 Hz
Mounting Torque	2.7 to 6.8 Nm

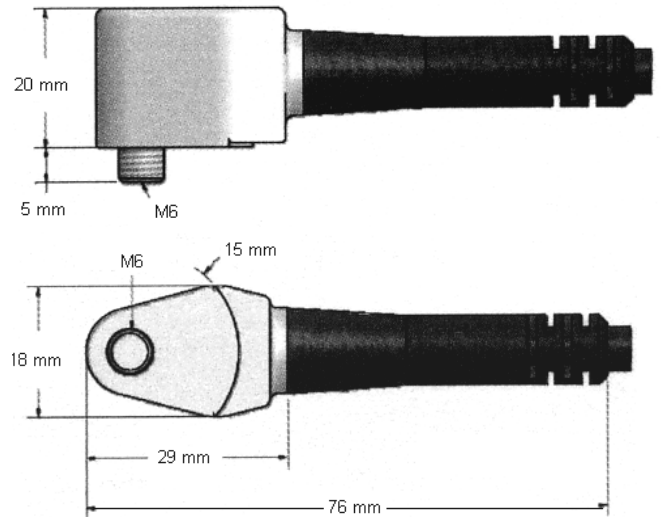

### Mounting / Order Code

Integral Cable      Order Code AT112-HF-IS

### Applications

Air Handlers	Fans
Motors	Pumps
Spindles	Gear Boxes
Press sections	Process equip.
Dryer Sections	Etc.